



Parker Bold Valve wiring

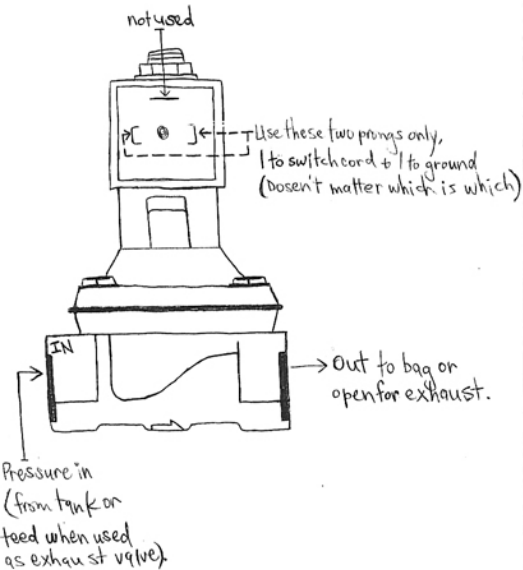

Inside Square D Pressure Switch

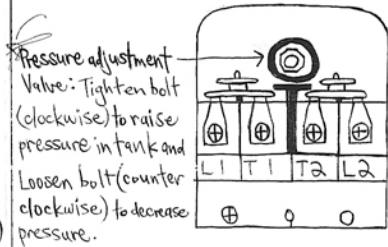

L1 and T2 get power from battery (12 volts +) with a constant duty relay. Use at least 8 gauge power wire with a 40 amp fuse at the battery. T1 and L2 go to the red (+) power wire on the compressor (s).

On the back of the Sq. D

Takes 1/4" m INTO back of pressure switch which must be teed off of the tank to monitor tank pressure.

